

# BATTEN SERIES

## INSTALLATION INSTRUCTION



IP66	IK08	220-240V	5 YRS Warranty	40-60 WATTS
------	------	----------	-------------------	----------------

Upon request

1-10V	DALI
-------	------

### PHYSICAL

Body	Polycarbonate
Finish	Polycarbonate Milky or Frosted
<b>OPTICAL</b>	Grey
Diffuser	
Light Emission	Symmetrical
Aiming	Fixed

### ELECTRICAL

Light source	LED (lumileds)
CRI	>80
CCT	3000K - 4000K - 5000K - 6000K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-40°C ~ 50°C
Ambient Humidity	10% - 90%

Range	Rated Power(W)	Dimensions (mm)	Lumen(lm) MILKY PC	Lumen(lm) FROSTED PC
BATTEN 1.1	40W	L1200xW110xH85	4800lm	5000lm
BATTEN 1.2	40W	L1200xW110xH85	6120lm	6680lm
BATTEN 1.3	60W	L1500xW110xH85	9540lm	10200lm

### SURFACE MOUNTED INSTALLATION

1

Install the expansion screws and screws in proper position.

2

Open the buckle along the arrow with the tool.

3

Put the cable across to the cable gland and wiring into terminal, ensure "L", "N" and "G" wiring is in right position.

4

Turn the cable gland clockwise and tight.



5

Install buckles along the arrow to secure the lampshade.

6

Finely put the finished lamp into the mounting bracket.

# TECHNICAL DRAWING

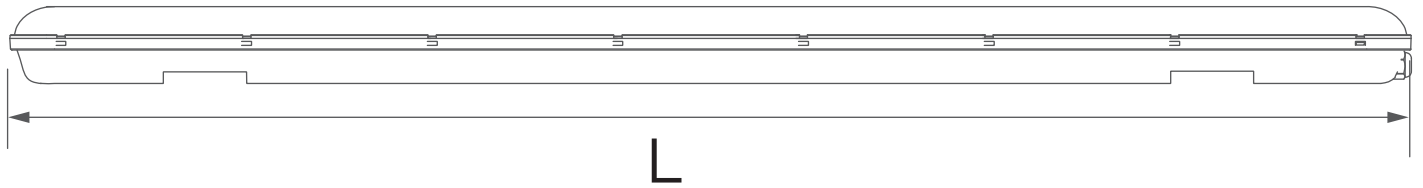

Opal & frosted diffusers (optional)



Integrated diffuser & reflector design



## SAFETY INSTRUCTIONS:

- Please read this instruction carefully before the commencement of installation and pass it on to the user of the equipment.
- The installation must be carried out by qualified personnel.
- Disconnect the main voltage, before starting the installation work.
- The light source of this luminaire is not replaceable when the light source reaches the end of its useful life, the entire luminaire is substituted.
- This fixture is not suitable for handheld use. It should be mounted in a fixed and safe place.
- Improper handling of the components or the luminaire itself could damage the correct function of this product, thus avoiding the manufacturer's warranty.
- Luminaire is suitable for indoor/outdoor use.
- BEYOND LIGHTING FACTORY is not responsible for the improper use or modifications made to the product.
- In case the external flexible cable or cord of the fixture is damaged, to avoid danger it should only be replaced by the manufacturer or equivalent qualified personnel.
- For possible malfunctions, the defective products must be disassembled and delivered to the manufacturer company without any intervention. During the dismantling of the product, the cable insulation should not be damaged. Also, the cable should not be cut too close to the product. Enough cable should be left to take out the fixture.
- The report, which will be formed as a result of the tests to be made regarding the malfunction, will be shared with the customer, and if necessary, the product will be delivered back to the customer by eliminating the problems according to the warranty.