

BATTEN SERIES



IP66

IK08

220-240V

5 YRS
Warranty

40 - 60
WATTS

Upon request

1-10V


DALI

PHYSICAL	
Body	Polycarbonate
Finish	Polycarbonate Milky or Frosted
OPTICAL	
Diffuser	Grey
Light Emission	Symmetrical
Aiming	Fixed
ELECTRICAL	
Light source	LED (lumileds)
CRI	>80
CCT	3000K - 4000K - 5000K - 6000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-40°C ~ 50°C
Ambient Humidity	10% ~ 90%

BATTEN SERIES is a waterproof batten LED fixtures that is ideal for outdoor use due to its high waterproof rating. However, it also offers dust and physical impact protection when used indoors.

This fixture is known for its durability, long lifespan ease of maintenance, and its ability to provide excellent lighting. Our top-notch linear solutions and competitive pricing further enhance our market presence.

- Integrated diffuser and Driver tray design.
- Milky/frosted diffuser.
- Marine grade accessories SS 316.
- Linkable connection available.

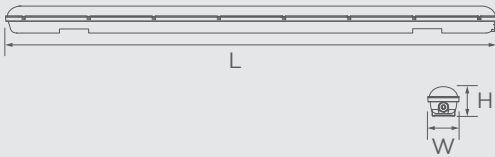

Emergency compatible

Range	Rated Power(W)	Dimensions (mm)	Lumen(lm) MILKY PC	Lumen(lm) FROSTED PC
BATTEN 1.1	40W	L1200xW110xH85	4800lm	5000lm
BATTEN 1.2	40W	L1200xW110xH85	6120lm	6680lm
BATTEN 1.3	60W	L1500xW110xH85	9540lm	10200lm

DIFFUSERS

Frosted

Integrated diffuser & reflector design

Opal

ORDERING CODE

SERIES NAME	PRODUCT RANGE	CCT	DIFFUSER	CONTROL	ACCESSORIES
BATTEN	I.1	30 3000K	O OPAL	1 ON-OFF	LC LINKABLE CONNECTOR
	I.2	40 4000K	F FROSTED	2 1-10V	SK SUSPENSION KIT
	I.3	50 5000K		3 DALI	
		60 6000K			