

LUNA SERIES

INSTALLATION INSTRUCTION



IP66 IK08 220-240V 5 YRS Warranty 30 - 75 WATTS

Upon request

1-10V DALI

PHYSICAL

Body	Aluminum alloy
Finish	Powder coating black (RAL9005)
Dimensions	ø400xH510mm




OPTICAL

Diffuser	Tempered glass and PC optical lens
Light distribution	More than 10 optics lens for optional



ELECTRICAL

Light source	LED
CRI	>70
CCT	3000K, 4000K, 5000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-30°C ~ +50°C
Humidity	10% ~ 90%RH



Range	Power (W)	Lumen (lm)
LUNA 1	30W	4500lm
LUNA 2	50W	7200lm
LUNA 3	60W	8700lm
LUNA 4	75W	11100lm

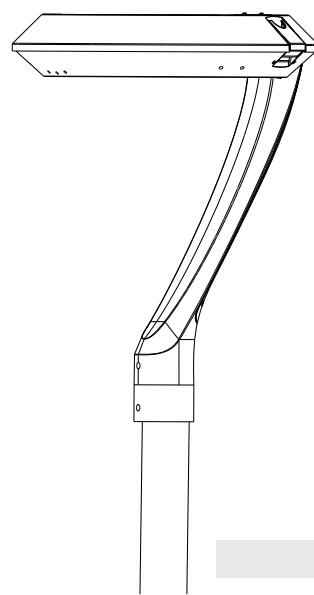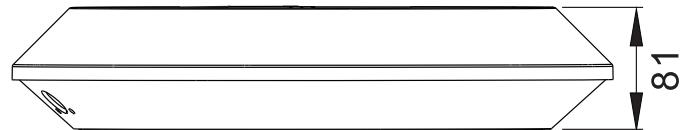
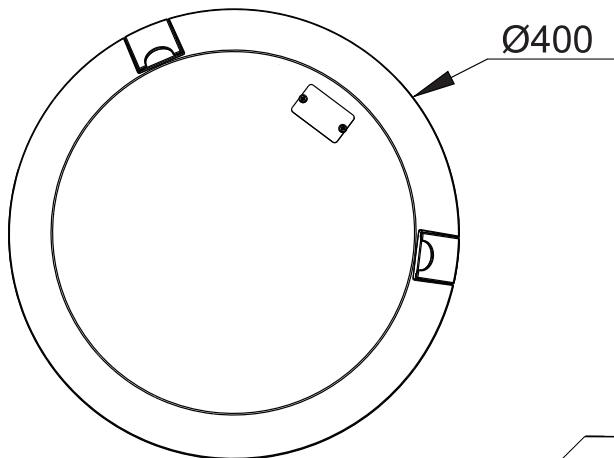


Single strut mount

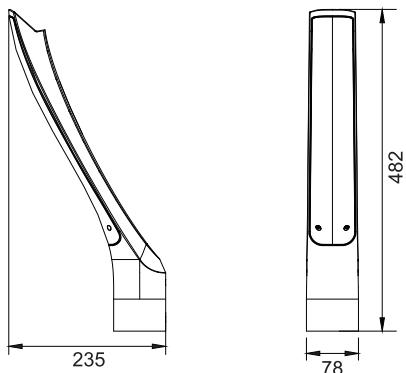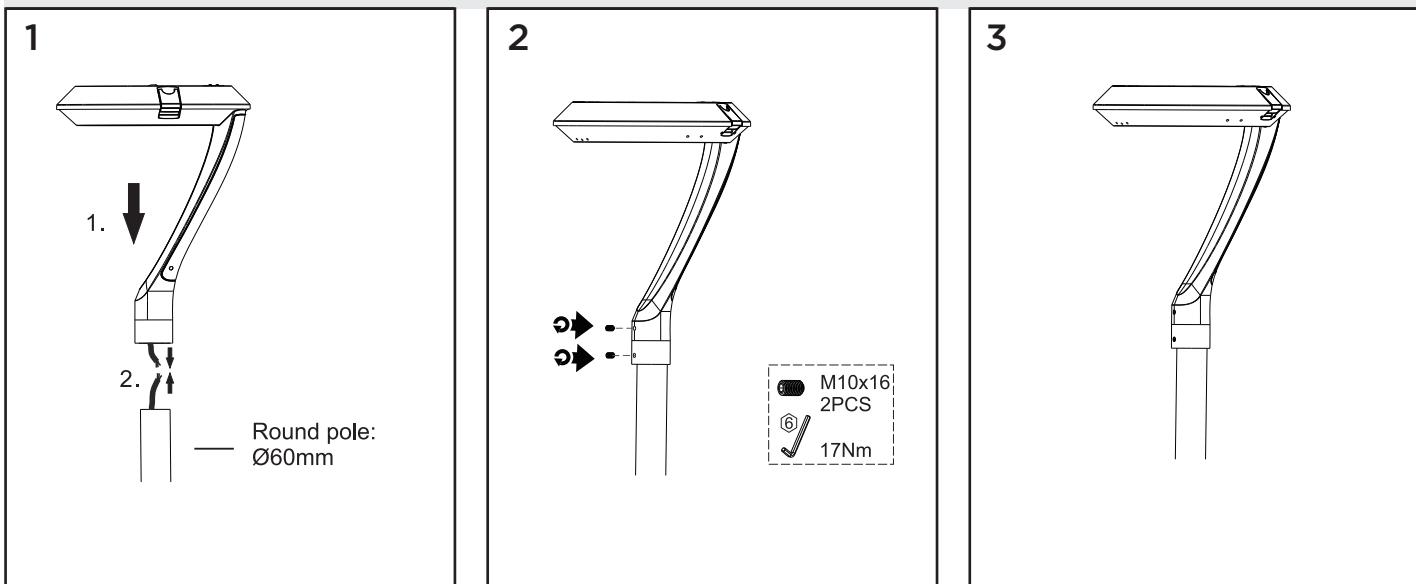


Double strut mount

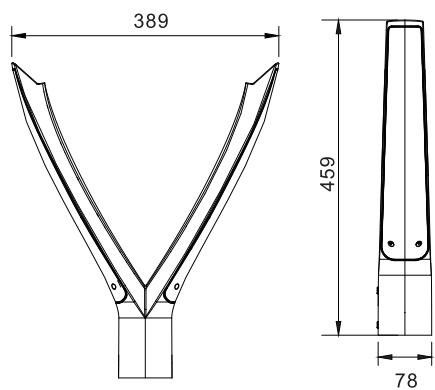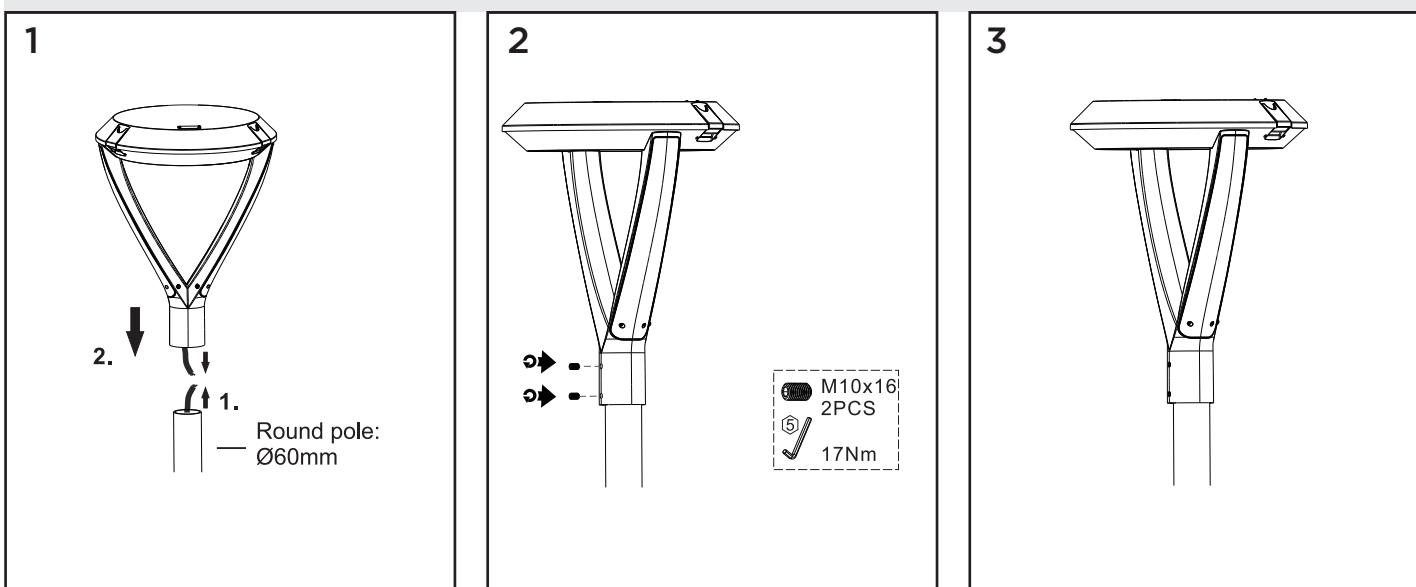




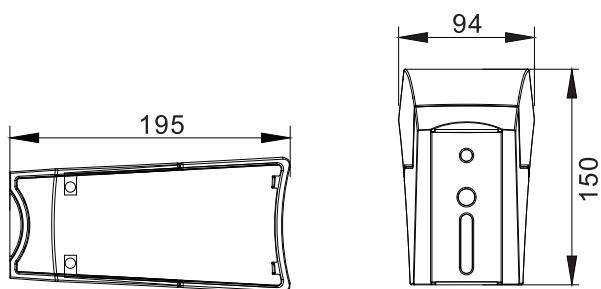
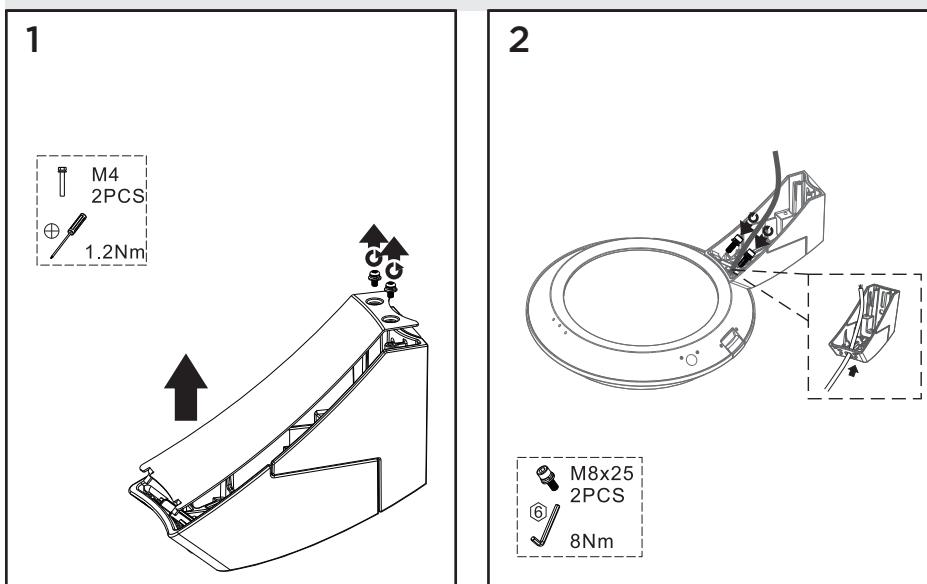


Square pole installation




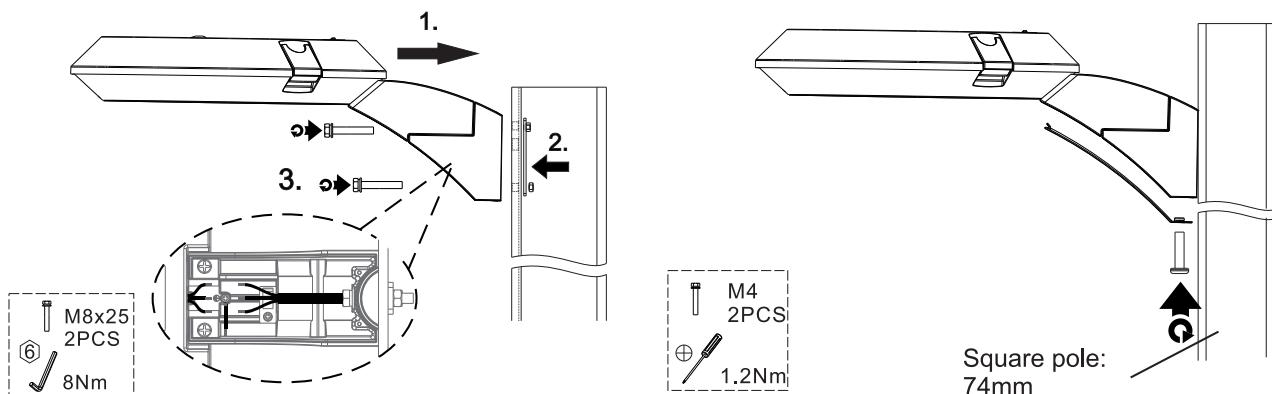


Round pole installation






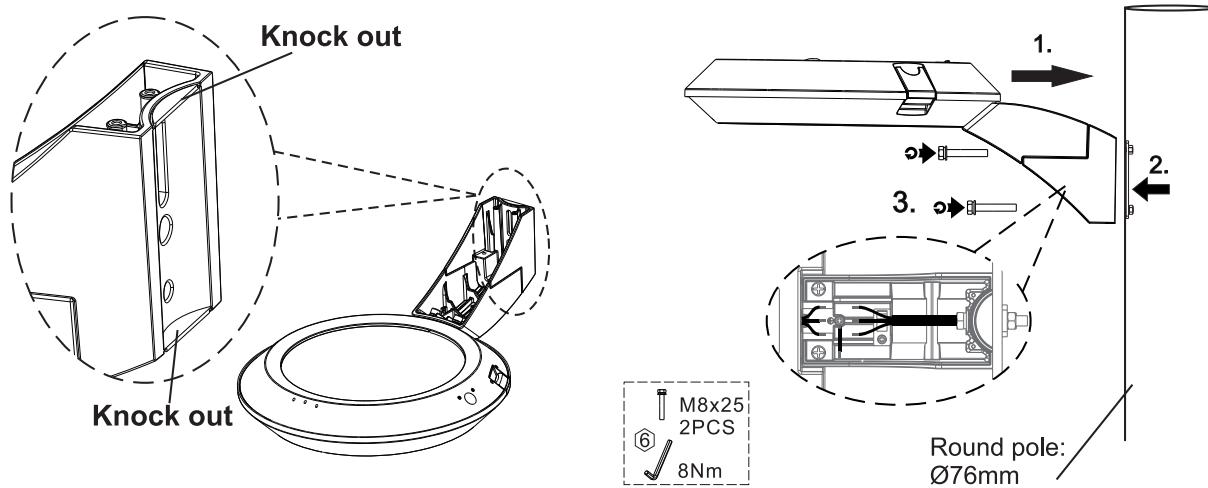




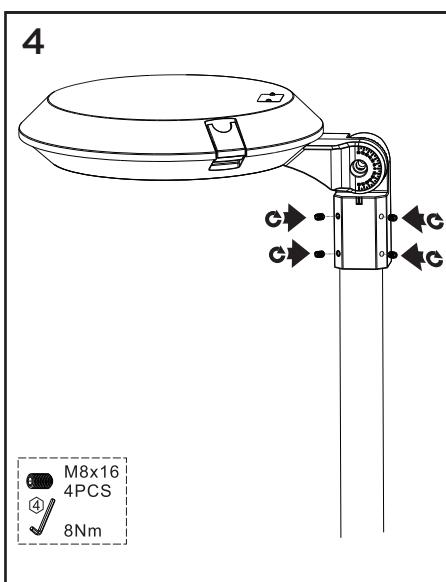
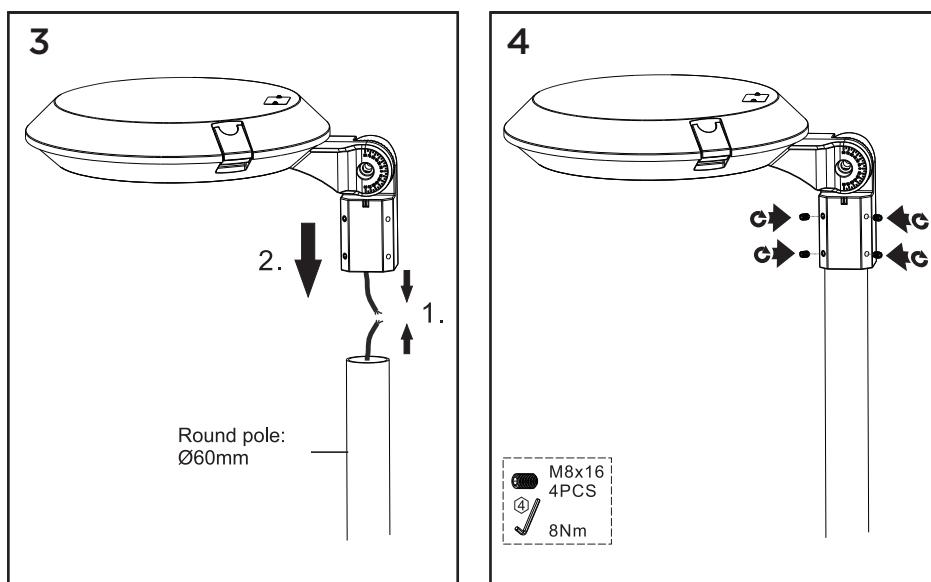
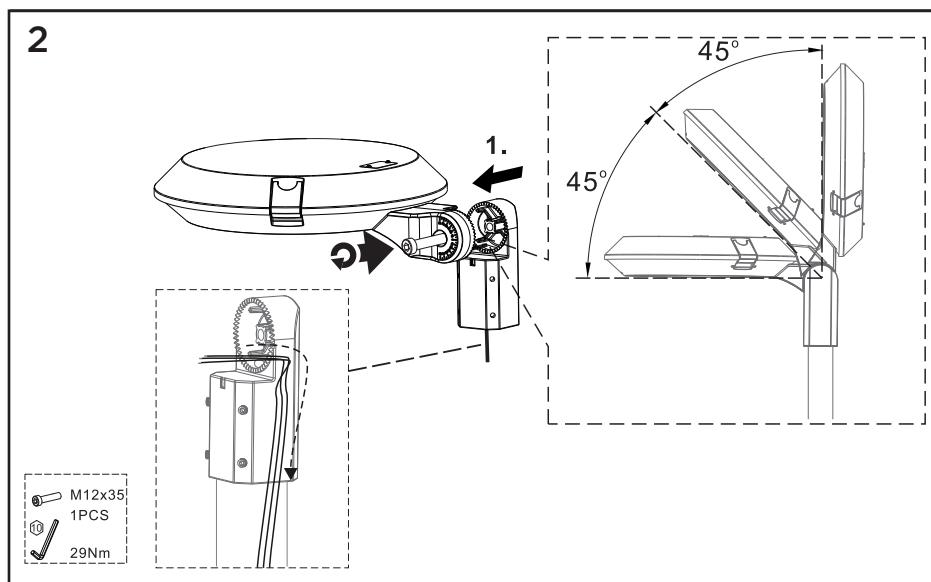
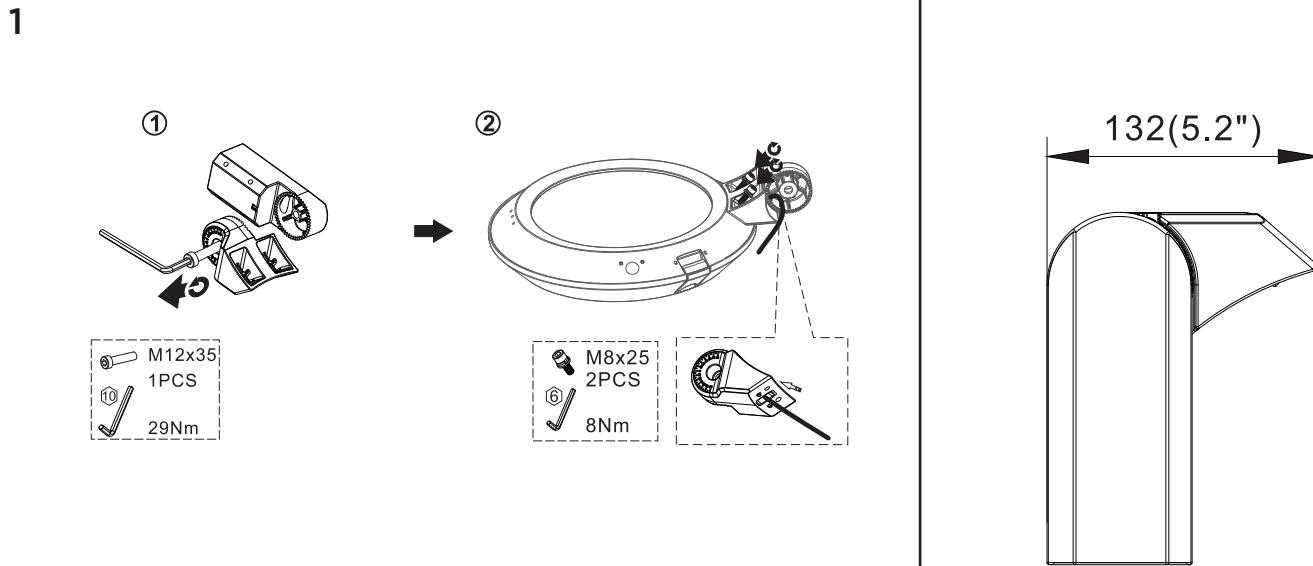


Gooseneck mount

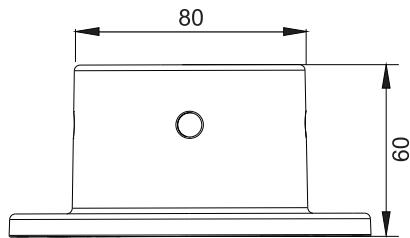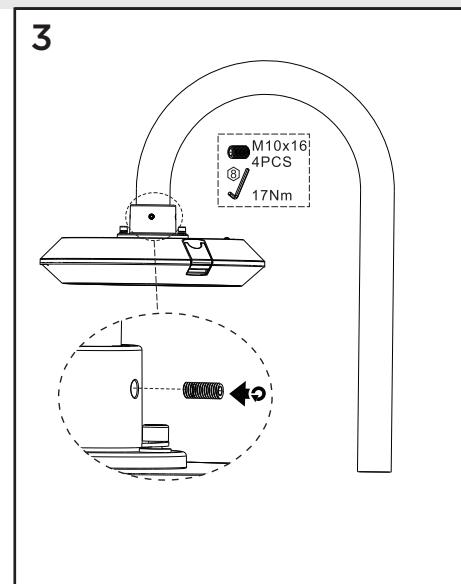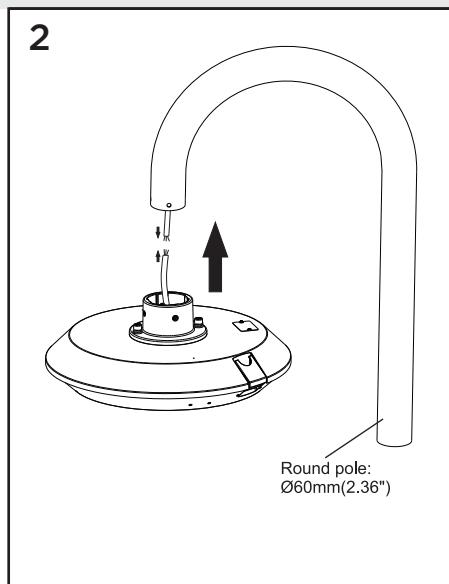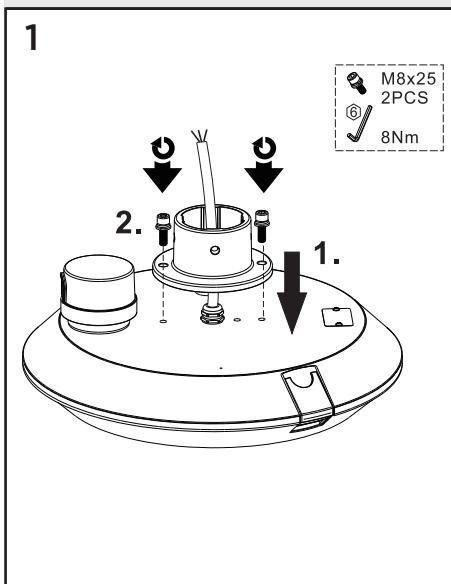

Suspension mount

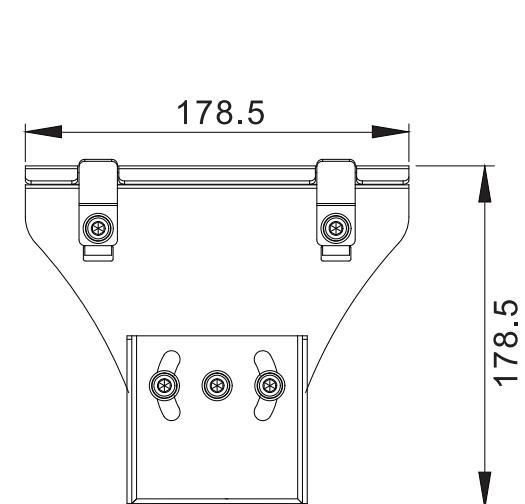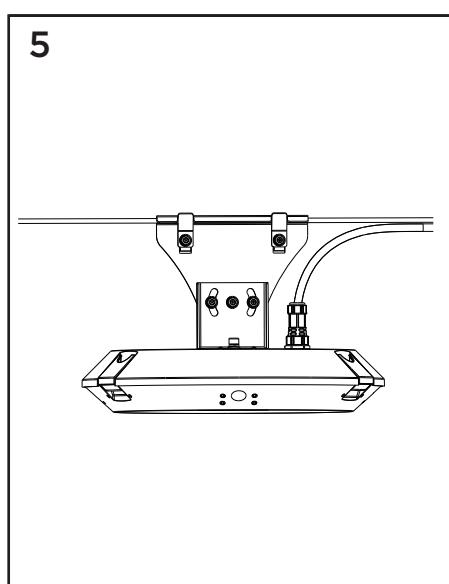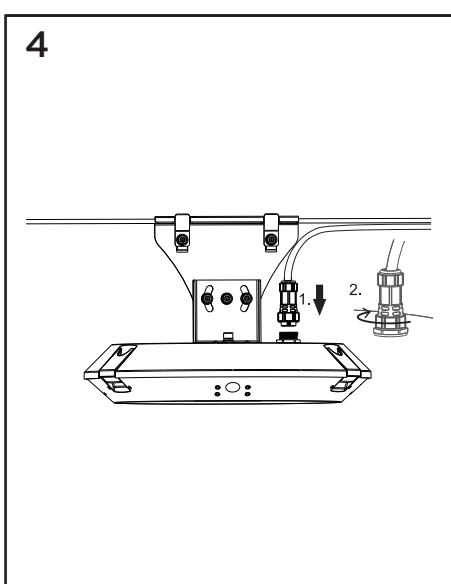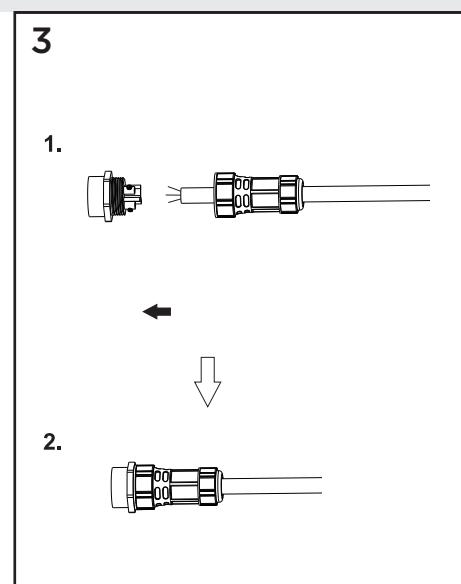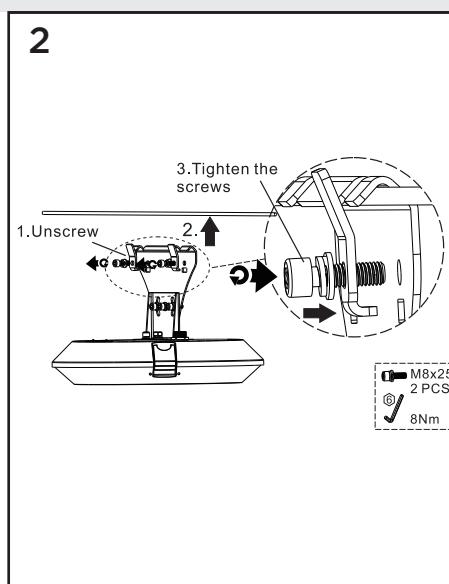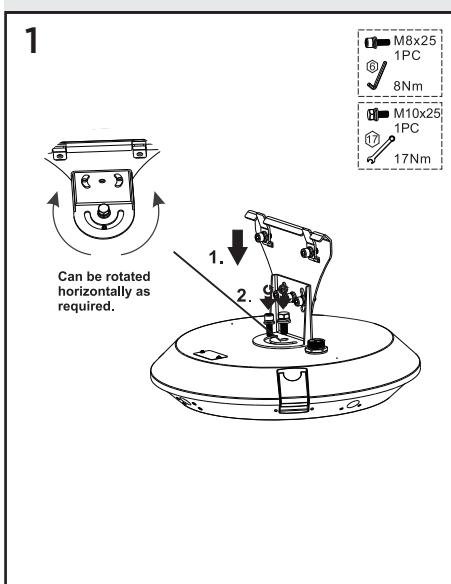

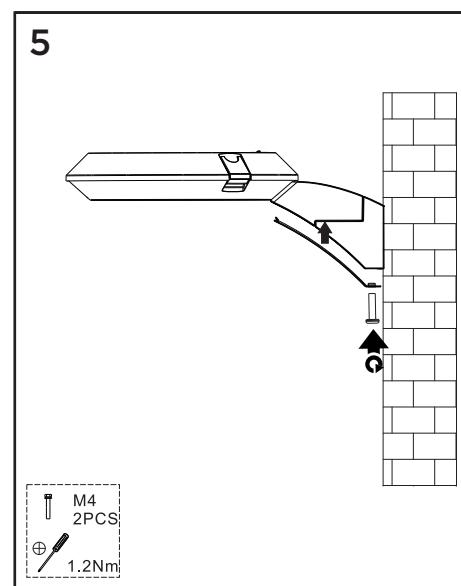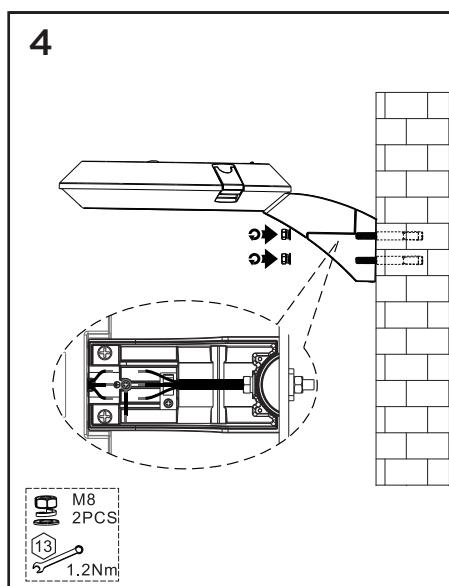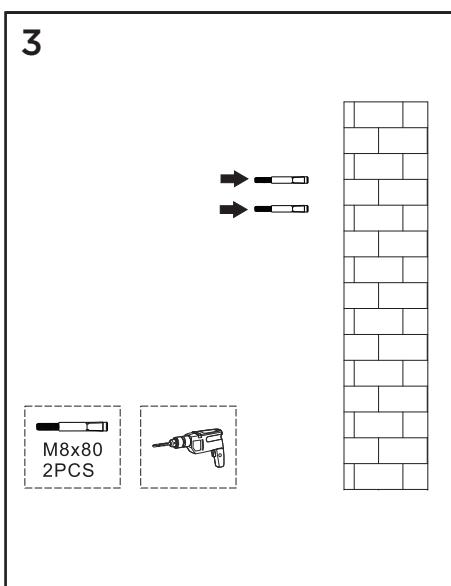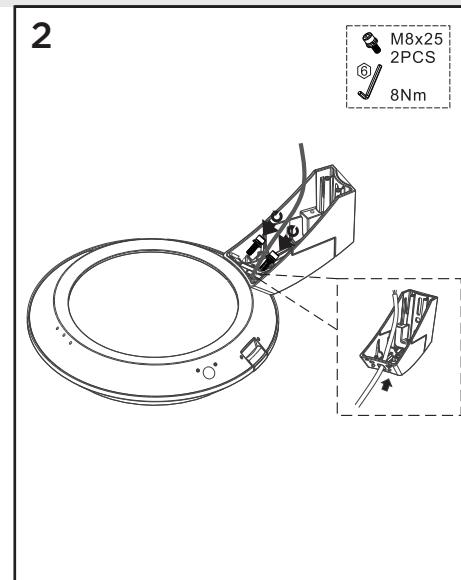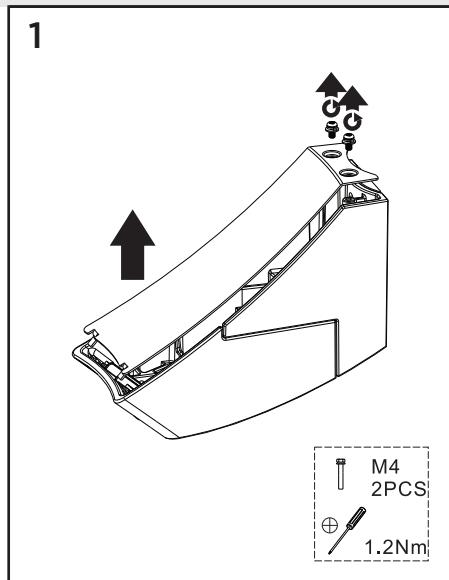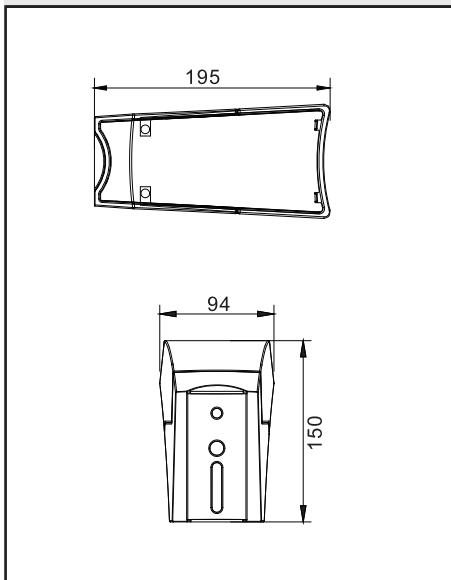

SAFETY INSTRUCTIONS:

- Please read this instruction carefully before the commencement of installation and pass it on to the user of the equipment.
- The installation must be carried out by qualified personnel.
- Disconnect the main voltage, before starting the installation work.
- The light source of this luminaire is not replaceable when the light source reaches the end of its useful life, the entire luminaire is substituted.
- This fixture is not suitable for handheld use. It should be mounted in a fixed and safe place.
- Improper handling of the components or the luminaire itself could damage the correct function of this product, thus avoiding the manufacturer's warranty.
- Luminaire is suitable for outdoor use.
- BEYOND LIGHTING FACTORY is not responsible for the improper use or modifications made to the product.
- In case the external flexible cable or cord of the fixture is damaged, to avoid danger it should only be replaced by the manufacturer or equivalent qualified personnel.
- For possible malfunctions, the defective products must be disassembled and delivered to the manufacturer company without any intervention. During the dismantling of the product, the cable insulation should not be damaged. Also, the cable should not be cut too close to the product. Enough cable should be left to take out the fixture.
- The report, which will be formed as a result of the tests to be made regarding the malfunction, will be shared with the customer, and if necessary, the product will be delivered back to the customer by eliminating the problems according to the warranty.