


# BEND BOLLARD (Dual)

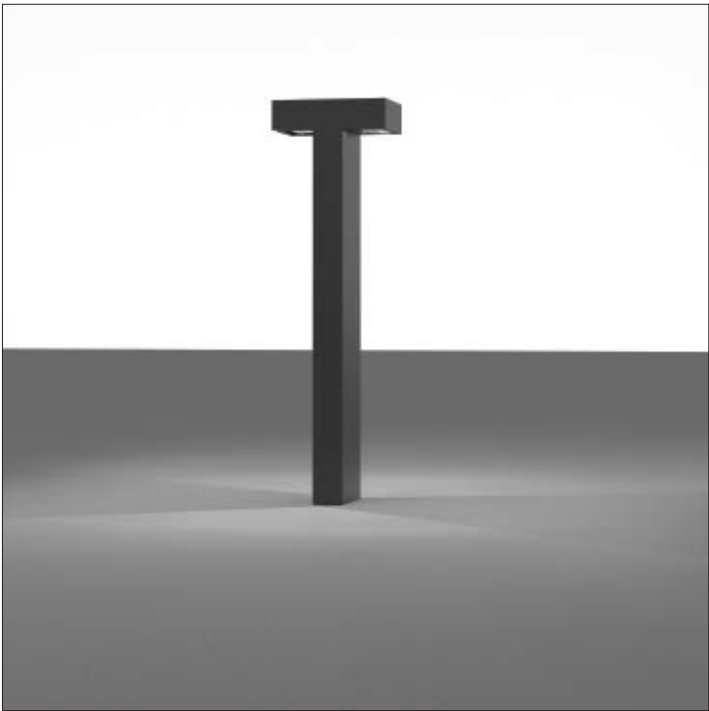

IP66	IK09	220-240V	5 YRS Warranty	20/40 WATTS
------	------	----------	-------------------	----------------

Upon request

1-10V	DALI
-------	------

## PHYSICAL

Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L180xW270xH1000mm

## OPTICAL

Diffuser	Clear Polycarbonate
Light distribution	Assymetric

## ELECTRICAL

Light source	LED
CRI	>80
CCT	3000K-4000K-5000K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH


**BEND BOLLARD** series is an L-shaped bollard design that represents a functional and aesthetically pleasing solution in urban architecture and infrastructure. This bollard has front and side asymmetrical light distribution, with an extruded aluminum body.

- Simple design that blends in with different types of architecture applications such as pathways, landscape areas, and other public spaces.
- Single or double head options.




Range	Power(W)	Front light emission lumen(lm)	Side light emission lumen(lm)
BEND DUAL 1	20W	2x1112.5lm	2x980lm
BEND DUAL 2	40W	2x2225lm	2x1960lm

## AVAILABLE OPTICS



Front light emission



Side light emission

## ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

BEND BOLLARD	1	30 3000K	F FRONT	1 ON-OFF
DUAL	2	40 4000K	S SIDE	2 1-10V
		50 5000K		3 DALI