

SIDRA TILTABLE SERIES

INSTALLATION INSTRUCTION



IP67

IK10

220-240V

5 YRS
Warranty

14 - 60
WATTS

Upon request

1 - 10V

PHYSICAL

Body	Anodized die-cast Aluminum
Frame	Stainless Steel 316L
Recessing tube	Aluminum Alloy

OPTICAL

Diffuser	19mm Tempered Glass
Light Emission	Symmetrical
Aiming	Fixed
CRI	>80

ELECTRICAL

CCT	3000K - 4000K - 5000K
Driver	Integrated LED driver 220-240V 50/60Hz
Ambient Temp.	-25°C - 50°C
Ambient Humidity	10% - 90%

Series	Rated Power(W)	Lumen (lm)	Dimensions (mm)	LED Quantity (pcs)	Beam angle
SIDRA TILTABLE 3.4	16W	1040lm	Ø210xH164	6 pcs	8°,12.5°,20°,30°,45°,60°,15x30°,10x60°
SIDRA TILTABLE 3.5	14W	910lm	Ø260xH196	12 pcs	8°,12.5°,20°,30°,45°,60°,15x30°,10x60°
SIDRA TILTABLE 3.5.1	32W	2080lm	Ø260xH196	12 pcs	8°,12.5°,20°,30°,45°,60°,15x30°,10x60°
SIDRA TILTABLE 3.6	42W	3570lm	Ø330xH265	12 pcs	6°,8°,12°,20°,30°,60°,10x70°
SIDRA TILTABLE 3.6.1	60W	6600lm	Ø330xH265	12 pcs	6°,8°,12°,20°,30°,60°,10x70°

INSTALLATION MANUAL

1

Open the hole for the fixture to be mounted. After preparing the drainage, fill the hole with gravel up to 20-30 cm. To check the drainage, pour a bucket of water into the open pit and make sure that the water is drained within 15-20 minutes. Take attention with the position level being careful to place a suitable drainage bed.

2

Pass the cable through the hole of the recessing box. Place the recessed box on the floor.


3

Connect the cable you prepared to the cable of the luminaire with the use of an IP68 connector or special insulation material.

4

Place the luminaire into the recessing box and tighten the provided screws

TECHNICAL DRAWING

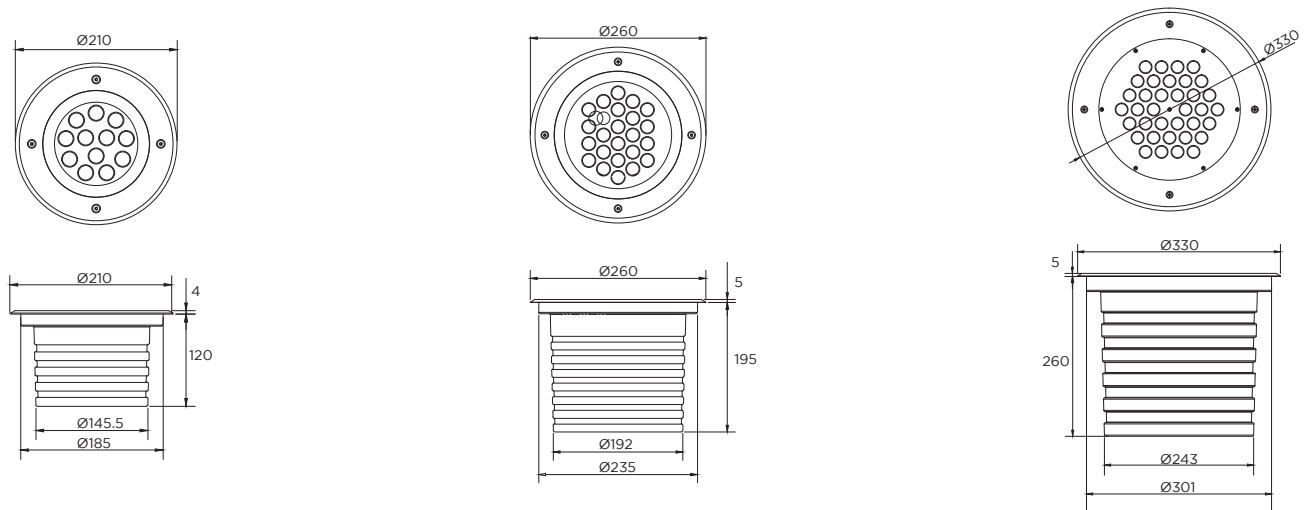

SAFETY INSTRUCTIONS:

- Please read this instruction carefully before the commencement of installation and pass it on to the user of the equipment.
- The installation must be carried out by qualified personnel.
- Disconnect the main voltage, before starting the installation work.
- The light source of this luminaire is not replaceable when the light source reaches the end of its useful life, the entire luminaire is substituted.
- This fixture is not suitable for handheld use. It should be mounted in a fixed and safe place.
- Improper handling of the components or the luminaire itself could damage the correct function of this product, thus avoiding the manufacturer's warranty.
- Luminaire is suitable for outdoor use.
- BEYOND LIGHTING FACTORY is not responsible for the improper use or modifications made to the product.
- In case the external flexible cable or cord of the fixture is damaged, to avoid danger it should only be replaced by the manufacturer or equivalent qualified personnel.
- For possible malfunctions, the defective products must be disassembled and delivered to the manufacturer company without any intervention. During the dismantling of the product, the cable insulation should not be damaged. Also, the cable should not be cut too close to the product. Enough cable should be left to take out the fixture.
- The report, which will be formed as a result of the tests to be made regarding the malfunction, will be shared with the customer, and if necessary, the product will be delivered back to the customer by eliminating the problems according to the warranty.