

EDGE OPEN POLE SERIES



IP68

IK09

220-240V

5 YRS
Warranty

60 - 90
WATTS

Upon request


1-10V

DALI

PHYSICAL	
Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L200xW100xH3000mm
OPTICAL	
Diffuser	Clear Polycarbonate
Light distribution	2 ways light distribution
ELECTRICAL	
Light source	LED
CRI	>70
CCT	3000K, 4000K, 5000K, 5700K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH


EDGE OPEN series is a distinctive bollard design that provides vibrant illumination for pathways, landscape zones, and various public areas.

- Reduced glare through a concealed light source.
- Enhanced linear forward light distribution option with complete cut-off and minimized stray light.
- Simple installation and maintenance.
- Contemporary and refined design that adds a distinctive touch to outdoor applications.

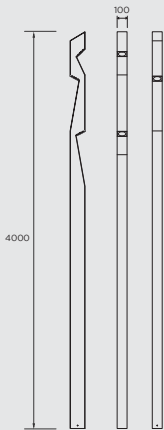

Range	Power (W)	Lumen (lm)
EDGE OPEN POLE 1	3x20W	3x2700lm
EDGE OPEN POLE 2	3x25W	3x3175lm
EDGE OPEN POLE 3	3x30W	3x3600lm

AVAILABLE OPTICS

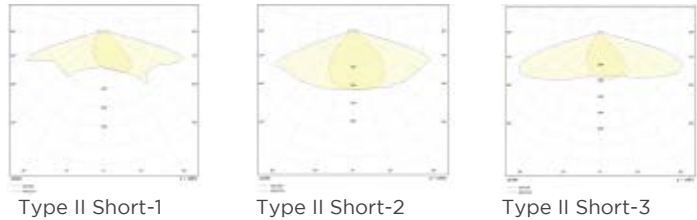

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL

EDGE OPEN POLE	1	30 3000K	1 TYPE II-1	1 ON-OFF
	2	40 4000K	2 TYPE II-2	2 1-10V
	3	50 5000K	3 TYPE II-3	3 DALI
		57 5700K		