


QUADRANT POLE SERIES

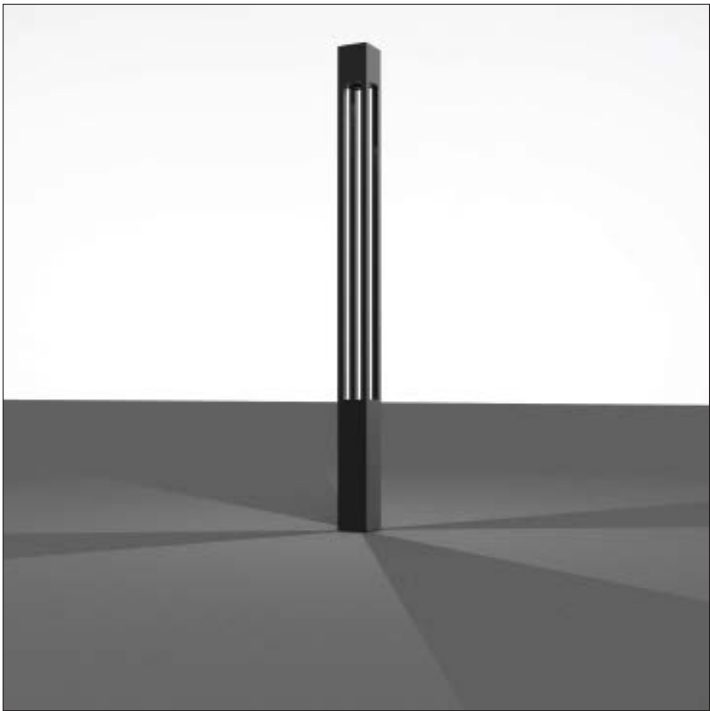

IP68

IK09

SOLAR

5 YRS
Warranty

30 - 60
WATTS

Upon request


1-10V

DALI

PHYSICAL	
Body	Aluminium Extruded Profile
Finish	Polyester Powder Coated
Dimensions	L200xW200xH3000mm
OPTICAL	
Diffuser	Opal Polycarbonate
Light distribution	4 ways light distribution
ELECTRICAL	
Light source	LED
CRI	>70
CCT	3000K, 4000K, 5000K, 5700K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-40°C ~ +50°C
Humidity	10% ~ 90%RH

QUADRANT POLE series of poles with minimal design available in various heights. Designed to illuminate paths, parks, walkways and gardens without glaring. The external screws are in stainless steel 316L.

Available in 2 meters height.

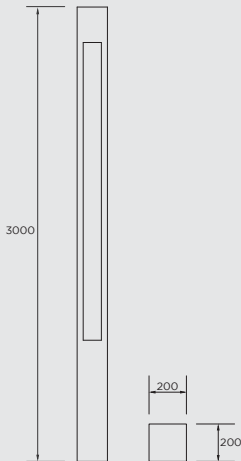

Range	Power (W)	Lumen (lm)
QUADRANT POLE 1	30W	4950lm
QUADRANT POLE 2	40W	6400lm
QUADRANT POLE 3	50W	7500lm
QUADRANT POLE 4	60W	8400lm

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - CONTROL

QUADRANT POLE	1	30 3000K	1 ON-OFF
	2	40 4000K	2 1-10V
	3	50 5000K	3 DALI
	4	57 5700K	