

REY FLOODLIGHT



Upon request



PHYSICAL

Body	Die cast aluminum
Finish	Silver grey / Black


OPTICAL

Aiming	30°,60°,90°,50x100°,30x90°,110°
Diffuser	Tempered glass
CRI	>80

ELECTRICAL

Light source	LED
CCT	3000K, 4000K, 5000K
Driver	220-240Vac
Ambient Temp.	-30°C - +50°C
Ambient Humidity	10% - 90%
Light source Life	50,000 h

Range	Power (W)	Lumen (lm)	Dimensions (mm)
REY 1	20W	3200lm	L202xW56xH277mm
REY 2	30W	4800lm	L202xW56xH277mm
REY 3	50W	8000lm	L202xW56xH277mm
REY 4	80W	12800lm	L270xW54xH342mm
REY 5	100W	16000lm	L270xW54xH342mm
REY 6	120W	19200lm	L270xW54xH342mm
REY 7	150W	24000lm	L367xW60xH390mm
REY 8	200W	32000lm	L367xW60xH390mm
REY 9	240W	38400lm	L392xW78xH462mm
REY 10	300W	48000lm	L392xW78xH462mm

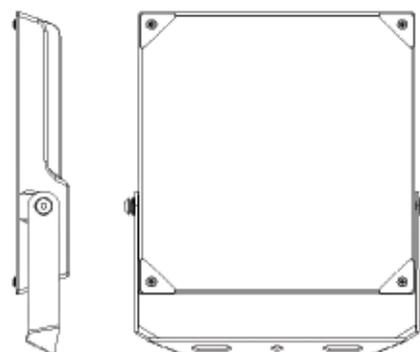

REY FLOODLIGHT is a series of projectors to be mounted on pole system, wall, floor. Available in several sizes, tiltable on the vertical axis, they are designed for the lighting of parking lots, cycle paths, squares, façades, green areas, perimeter areas and other architectural elements in general thanks to a wide range of optics and wattages.

ORDERING CODE

SERIES NAME - PRODUCT RANGE - FINISH - CCT - OPTICS - CONTROL

REY	1	G GREY	30 3000K	30 30°	1 ON-OFF
	2	B BLACK	40 4000K	60 60°	2 1-10V
	3		50 5000K	90 90°	3 DALI
	4			50100 50x100°	
	5			3090 30x90°	
	6			110 110°	
	7				
	8				
	9				
	10				