

# SIGNAL BOLLARD



IP65

IK09

220-240V

5 YRS  
Warranty

15/25  
WATTS

Upon request


1-10V

DALI

PHYSICAL	
Body	Die-cast Aluminum
Finish	Powder Coated
Dimensions	Type I: Ø170xH400mm
	Type II: Ø170xH600mm
	Type III: Ø170xH900mm
OPTICAL	
Diffuser	Clear Polycarbonate
Light distribution	Assymetric
ELECTRICAL	
Light source	LED
CRI	>80
CCT	3000K-4000K-5000K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Operating Temperature	-20°C ~ + 50°C
Humidity	10% ~ 95%RH

**SIGNAL** series of bollards with pleasant aesthetics and a touch of prestige for any residential and landscape setting, with the most energy-efficient lighting technologies. Signal is a bollard for driveways, parks and pedestrian walkways etc.

Range	Power(W)	Lumen(lm)
SIGNAL 1	15W	1125lm
SIGNAL 2	25W	1625lm

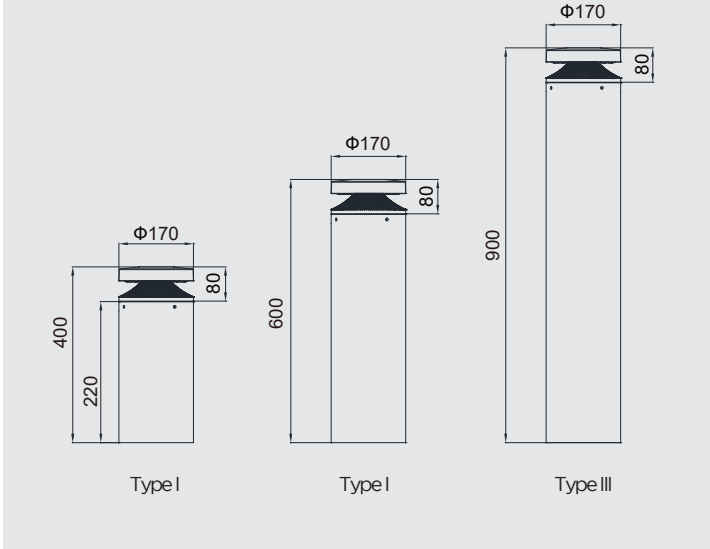

## ORDERING CODE

SERIES NAME - PRODUCT RANGE - HEIGHT - CCT - CONTROL

SIGNAL	I 2	I TYPE I II TYPE II III TYPE III	30 3000K 40 4000K 50 5000K	1 ON-OFF 2 1-10V 3 DALI
--------	--------	--	----------------------------------	-------------------------------