

VIVID SPOTLIGHT SERIES



VIVID SPOTLIGHT SERIES features a robust die-cast copper-free aluminum body renowned for its high corrosion resistance, complemented by a durable powder coating with phosphochromating pre-finish. Stainless steel screws ensure secure assembly, while the transformer operates efficient-ly with an electronic power supply at 220/240V 50/60Hz, built directly into the unit. A silicone rubber gasket provides reliable sealing, and tempered glass ensures strength and safety. The fixture's design allows for full rotation of 360° horizontally and +90° vertically, offering versatile positioning options.

IP66

IK08

220-240V

5 YRS
Warranty

3 - 60
WATTS

+/- 90°

360°

Upon request

0 - 10V

DALI

DMX


RGBW

PHYSICAL	
Body	High corrosion resistance die-cast copper-free aluminum body
Finish	Powder coated with phosphochromating pre-finish Textured grey, Anthracite grey, Matt black, Bronze
Screws	Stainless steel
Gasket	Silicone rubber
OPTICAL	
Diffuser	Tempered Glass
Beam angle	18°,24°,36°,60°,40x70°
Aiming	Rotatable with accessories
CCT	2700K/3000K/4000K/5000K/RGBW
CRI	>80
SDCM	McAdam step 3
ELECTRICAL	
Light source	LED
Efficacy	90 lm/W
Driver	Integrated LED driver 220-240V 50/60Hz
Power cable	0.5 mt. neoprene power cable included
Ambient Temp.	-25°C ~ 50°C
Ambient Humidity	10% - 90%







VIVID1

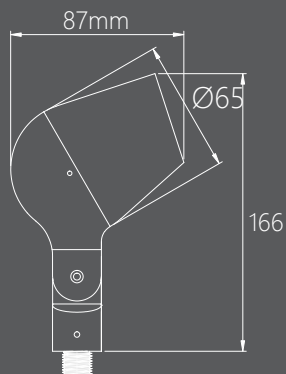

VIVID2

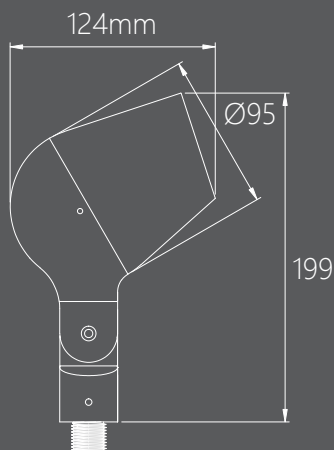

VIVID3

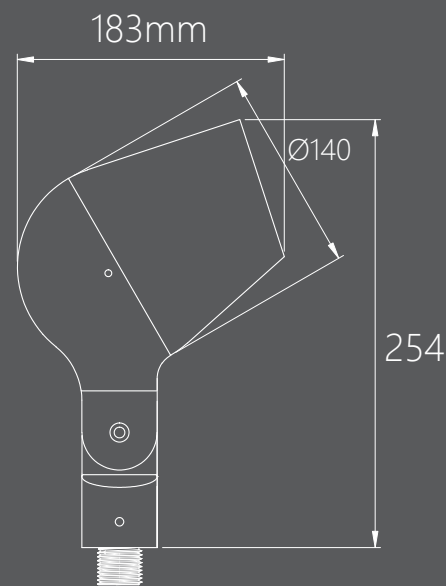

PRODUCT RANGE


	Rated Power(W)	Lumen(lm)	Dimensions(mm)	LED Quantity(pcs)	CCT(K)	Control
VIVID 1.1	3W	270lm	Ø65xH166	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 1.2	6W	540lm	Ø65xH166	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 1.3	8W	720lm	Ø65xH166	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 2.1	10W	900lm	Ø95xH199	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 2.2	12W	396lm	Ø95xH199	SMD 3 pcs	RGBW	Integrated DMX decoder(24Vdc)
VIVID 2.3	15W	1350lm	Ø95xH199	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 2.4	20W	1800lm	Ø95xH199	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 3.1	30W	2700lm	Ø140xH254	COB 1 pcs	Single	Integrated ON-OFF driver and DALI/Dimming driver
VIVID 3.2	40W	3600lm	Ø140xH254	COB 1 pcs	Single	Integrated ON-OFF driver and DALI/Dimming driver
VIVID 3.3	60W	5400lm	Ø140xH254	COB 1 pcs	Single	Integrated ON-OFF driver, Remote DALI/Dimming driver(36Vdc)
VIVID 3.4	24W	792lm	Ø140xH254	SMD 3 pcs	RGBW	Integrated DMX decoder(24Vdc)
VIVID 3.5	36W	1188lm	Ø140xH254	SMD 3 pcs	RGBW	Integrated DMX decoder(24Vdc)
VIVID 3.6	10W	900lm	Ø140xH254	COB 1 pcs	Single	Integrated DALI/Dimming driver
VIVID 3.7	15W	1350lm	Ø140xH254	COB 1 pcs	Single	Integrated DALI/Dimming driver
VIVID 3.8	20W	1800lm	Ø140xH254	COB 1 pcs	Single	Integrated DALI/Dimming driver

*The lumen output may vary depending on the beam angle, and the use of anti-glare accessory.


ORDERING CODE

SERIES NAME - PRODUCT RANGE - FINISH - CCT - OPTICS - CONTROL - ACCESSPROES


VIVID	1.1	G Grey	27 2700K	Refer to	1 ON-OFF	HG Honeycomb grill
	1.2	AG Anthracite	30 3000K	above table	2 0-10V	JB Junction box
	2.1	MB Matt black	40 4000K		3 DALI	WM Wall mounted
	2.2	B Bronze	50 5000K			SB Surface mounted box
	2.3		RGBW			SP Spike
	2.4					TM Tree mounted
	3.1					PM1 Pole mounted 1
	3.2					PM2 Pole mounted 2
	3.3					SL Sign light
	3.4					
	3.5					
	3.6					
	3.7					
	3.8					

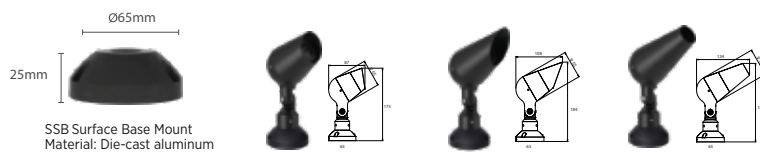


A1 - BASE FOR VIVID 1

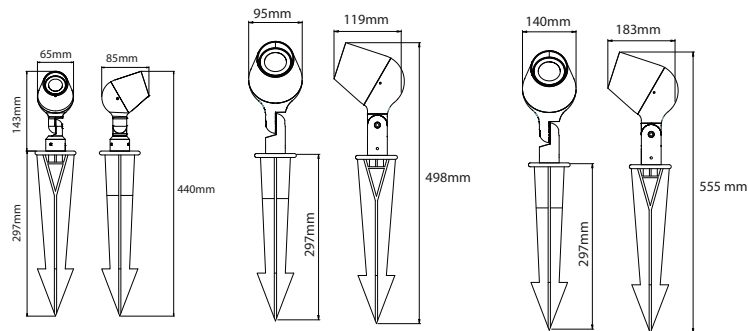



A2 - SPIKE



A3 - JUNCTION BOX




A4 - WALL MOUNT

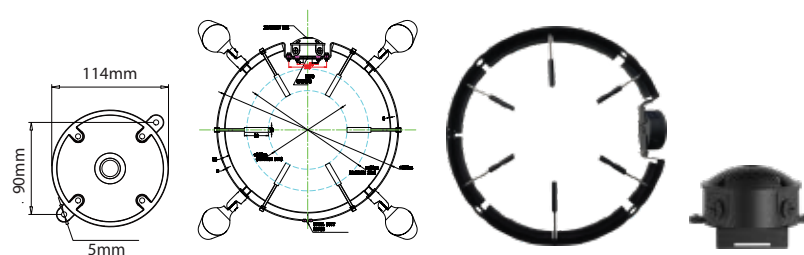


A5 - TREE MOUNT




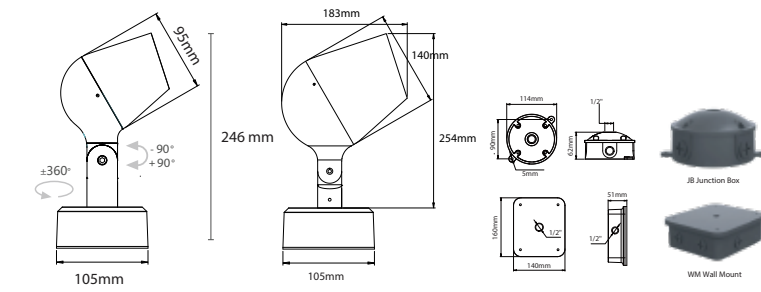


A6 - BASE FOR VIVID 2/3





**A7 - POLE MOUNTED
for VIVID 2/3**

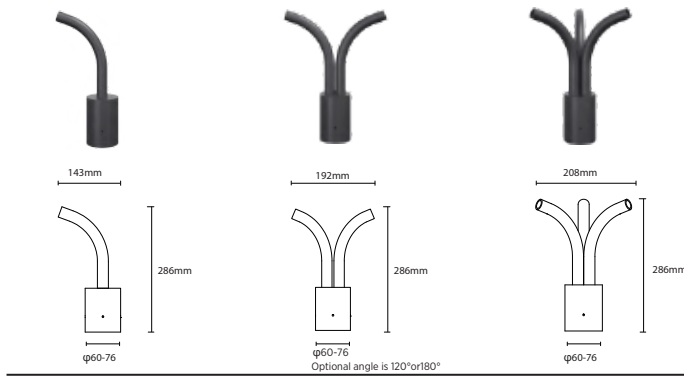

**A8 - POLE MOUNTED TYPE 2
for VIVID 2/3**

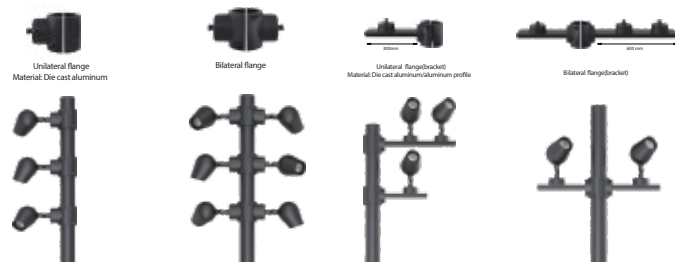

**A9 - POLE MOUNTED TYPE 3
for VIVID 2/3**

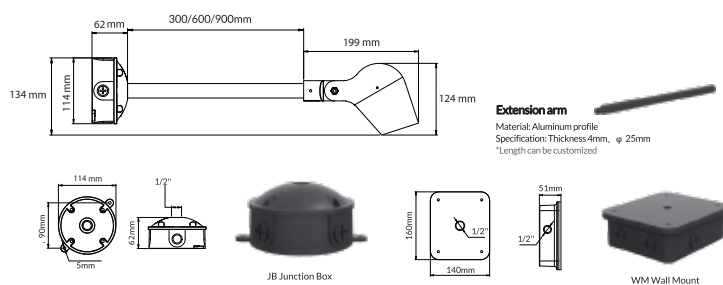

A10 - SIGN LIGHT

