

BATTEN 3 SERIES



IP66

IK08

220-240V

5 YRS
Warranty

20-60
WATTS

Upon request

1-10V

DALI

PHYSICAL	
Body	Polycarbonate
OPTICAL	
Diffuser	Milky Polycarbonate
Beam angle	120°
ELECTRICAL	
Light source	LED (Lumileds/Other brands available on request)
Efficacy	150lm/W , 170lm/W
CRI	>80
CCT	3000K - 4000K - 5000K - 5700K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-20°C ~ 50°C
Ambient Humidity	10% ~ 90%
Light source life	50,000 h

BATTEN 3 SERIES is a waterproof LED batten fixture designed for indoor and outdoor use, boasting a high waterproof rating. It also delivers excellent dust and impact resistance, making it a reliable choice for several applications.

Renowned for its durability, extended lifespan, and easy maintenance, this fixture provides outstanding lighting performance. Our premium linear solutions and competitive pricing further strengthen our market position.


Key Features:

- High efficient up to 170 lm/W.
- Integrated diffuser and driver tray design.
- Milky diffuser.
- Marine-grade stainless steel (SS 316) accessories.
- Linkable connection option available.




 Emergency compatible

Range	Rated Power(W)	Dimensions (mm)	Lumen(lm) 150lm/W	Lumen(lm) 170lm/W
BATTEN 3.1	20W	L600xW85xH80	3000lm	3400lm
BATTEN 3.2	40W	L1200xW85xH80	6000lm	6800lm
BATTEN 3.3	60W	L1500xW85xH80	9000lm	10200lm

Available optic

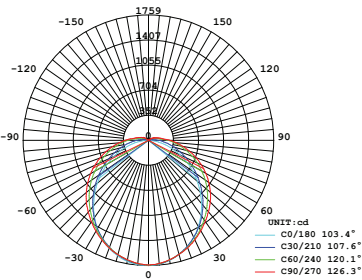

TECHNICAL DRAWING

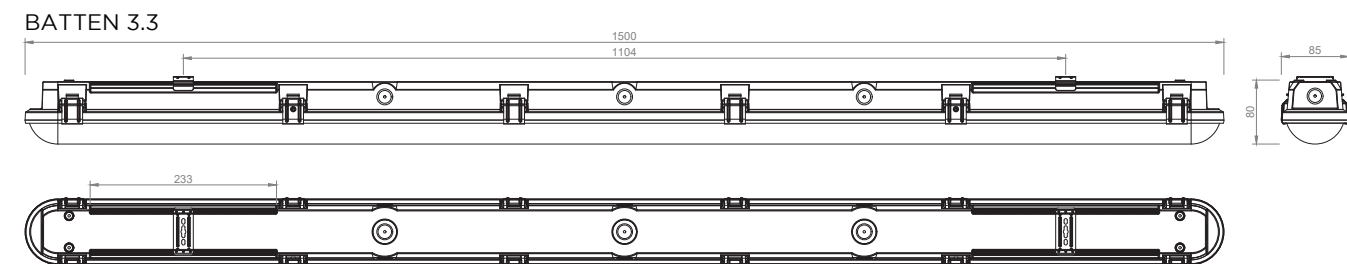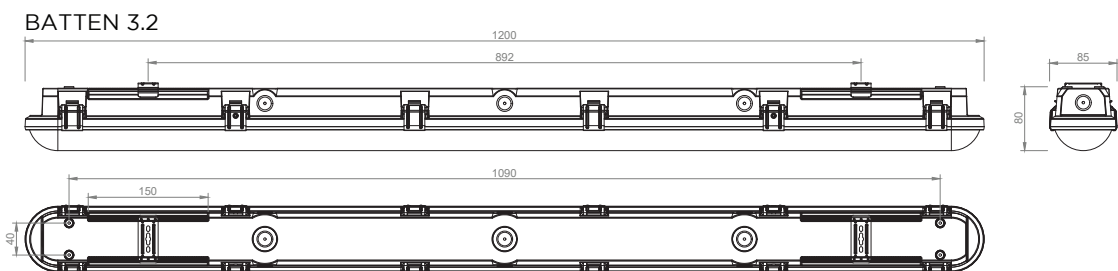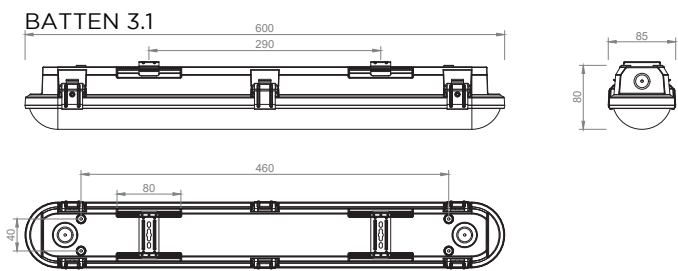

ORDERING CODE

SERIES NAME	PRODUCT RANGE	LUMEN	CCT	CONTROL	ACCESSORIES
BATTEN	3.1	15 150lm/W	30 3000K	1 ON-OFF	LC LINKABLE CONNECTOR
	3.2	17 170lm/W	40 4000K	2 1-10V	SK1 SUSPENSION KIT 1200mm
	3.3		50 5000K	3 DALI	SK2 SUSPENSION KIT 1500mm
			57 5700K		