

HIGH BAY GLOW SERIES



IP65	IK08	220-240V	5 YRS Warranty	60-200 WATTS	LOW GLARE	UGR <19
------	------	----------	-------------------	-----------------	--------------	------------

Upon request



PHYSICAL

Body	Aluminum Alloy
Finish	Powder Coating / Black (RAL9017)

OPTICAL

Optic	PC
-------	----


ELECTRICAL

Light source	LED
CRI	>70 (Ra80 optional)
CCT	3000K,4000K,5000K
Driver	Electronic included 50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or Microwave motion sensor, PIR sensor



Ambient Temp.	-30°C ~ 50°C
Ambient Humidity	10% ~ 90%

HIGH BAY GLOW SERIES is a cost-effective and compact high bay with super high efficacy 160lm/W, 200lm/W, 210lm/W. Together with twist central sensor makes the high bay solution more energy-saving and with higher performance. Optimized compact housing structure ensures excellent heat dissipation function with operating temperature: -30°C to +50°C.



- Product Features:
- Intelligent control: Twist microwave motion sensor and PIR sensor, 1-10V dimmable.
 - Multiple installations: loop hanging, ceiling mounting.
 - PC and ALU reflector are optional.

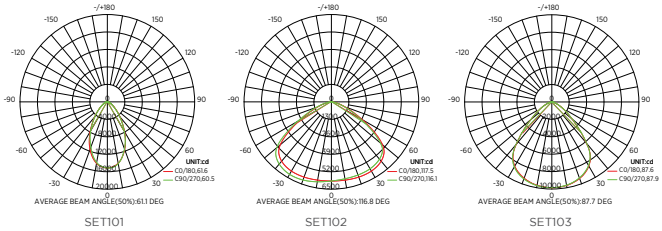



HIGH BAY 1



HIGH BAY 2



HIGH BAY 3



HIGH BAY GLOW A | 160lm/W

	Rated Power(W)	Dimensions (mm)	Lumen (lm)
HIGH BAY GLOW A 1.1	60W	Ø250xH164	9600 lm
HIGH BAY GLOW A 1.2	100W	Ø250xH164	16000 lm
HIGH BAY GLOW A 1.3	120W	Ø250xH164	19200 lm
HIGH BAY GLOW A 2	150W	Ø261xH169	24000 lm
HIGH BAY GLOW A 3	200W	Ø301xH170	32000 lm

HIGH BAY GLOW B | 200lm/W

	Rated Power(W)	Dimensions (mm)	Lumen (lm)
HIGH BAY GLOW B 1.1	60W	Ø250xH164	12000 lm
HIGH BAY GLOW B 1.2	100W	Ø250xH164	20000 lm
HIGH BAY GLOW B 1.3	120W	Ø250xH164	24000 lm
HIGH BAY GLOW B 2	150W	Ø261xH169	30000 lm
HIGH BAY GLOW B 3	200W	Ø301xH170	40000 lm

HIGH BAY GLOW C | 210lm/W

	Rated Power(W)	Dimensions (mm)	Lumen (lm)
HIGH BAY GLOW C 1.1	60W	Ø250xH164	12600 lm
HIGH BAY GLOW C 1.2	100W	Ø250xH164	21000 lm
HIGH BAY GLOW C 1.3	120W	Ø250xH164	25200 lm
HIGH BAY GLOW C 2	150W	Ø261xH169	31500 lm
HIGH BAY GLOW C 3	200W	Ø301xH170	42000 lm

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL - ACCESSORIES

HIGH BAY GLOW	A 1.1 A 1.2 A 1.3 A 2 A 3 B 1.1 B 1.2 B 1.3 B 2 B 3 C 1.1 C 1.2 C 1.3 C 2 C 3	30 3000K 40 4000K 50 5000K	1 SET101 2 SET102 3 SET103	1 ON-OFF 2 1-10V 3 DALI	MS Motion Sensor PIR PIR Sensor PL PC Lens PR PC Reflector Cover PR2 PC Reflector PR3 PC Reflector OL Optic Lens SC Safety Chain AC Aluminum Cover CB Ceiling mount Bracket AB Adjustable Bracket EK Emergency Kit box
---------------	---	----------------------------------	----------------------------------	-------------------------------	---

ACCESSORIES



Motion sensor



PIR sensor



PC LENS



PC reflector cover



PC reflector



Optic lens



Safety chain



PC reflector



Aluminum Reflector



Ceiling mount bracket



±90°Adjustable bracket



Emergency kit box