

# HIGH BAY TECH SERIES



IP65	IK08	220-240V	5 YRS Warranty	30-180 WATTS	LOW GLARE	UGR <22
------	------	----------	-------------------	-----------------	--------------	------------

Upon request

1-10V	DALI
-------	------

## PHYSICAL

Body	Aluminum Alloy
Finish	Powder Coating / White


## OPTICAL

Optic	Tempered Glass/Polycarbonate
-------	------------------------------

## ELECTRICAL


Light source	LED
CRI	>80
CCT	3000K,4000K,5000K
Driver	Electronic included   50-60Hz 220-240VAC Non-Dimmable Driver 1-10V dimming or DALI on request
Ambient Temp.	-30°C ~ 50°C
Ambient Humidity	10% ~ 90%

**HIGH BAY TECH** series features a snow-white body that pairs seamlessly with a PC diffuser, making it an outstanding choice for various commercial settings like shopping malls, spacious plazas, and large docking areas. The integration of a PC diffuser not only enhances efficacy, reaching up to 145lm/w, but also minimizes glare with a low UGR<22. Its straightforward and elegant appearance offers a solution for spaces with high aesthetic demands.

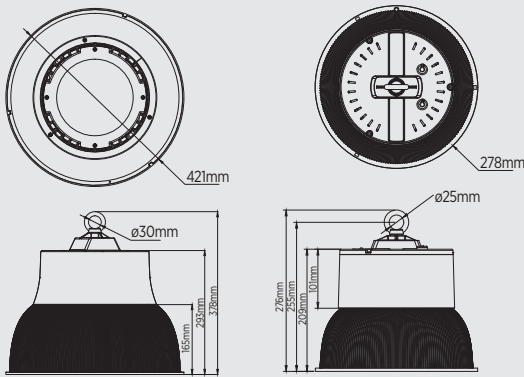


Range	Power(W)	Lumen(lm)	Dimensions(mm)
HIGH BAY TECH 2.1	30W	4350lm	ø278 H276mm
HIGH BAY TECH 2.2	50W	7250lm	ø278 H276mm
HIGH BAY TECH 2.3	75W	10875lm	ø278 H276mm
HIGH BAY TECH 3.1	100W	14500lm	ø421 H378mm
HIGH BAY TECH 3.2	120W	17400lm	ø421 H378mm
HIGH BAY TECH 3.3	150W	21750lm	ø421 H378mm
HIGH BAY TECH 3.4	180W	26100lm	ø421 H378mm

## 30-75W

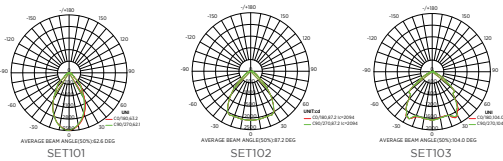

## 100-180W



## ORDERING CODE

SERIES NAME	PRODUCT RANGE	CCT	OPTICS	CONTROL	MOUNTING	ACCESSORIES
HIGH BAY TECH	2.1 2.2 2.3 3.1 3.2 3.3 3.4	30 3000K 40 4000K 50 5000K	1 SET101 2 SET102 3 SET103 4 SET104	1 1-10V 2 DALI	1 Loop Mounting 2 Ceiling Mounting	NA No Accessories SC Safety Chain CM Ceiling Mount Bracket

## ACCESSORIES



Safety chain



Ceiling mount  
bracket