

LED STRIP TUNABLE WHITE



IP20
IP67

24Vdc

5 YRS
Warranty

9.6
W/m

Upon request


1-10V

DALI


Material	High quality FPC
LED Quantity	140 LEDs/M
Dimensions	L5000xW10mm
Beam Angle	120°
Input voltage	24Vdc
Power	9.6 W/m
Light source	LED
CCT	Tunable white-2700K-6000K
Driver	24Vdc remote driver to be ordered separately
Cutting unit	625mm
Ambient Temp.	-20°C ~ 50°C

Product Features

- High quality FPC, authentic 3M tape;
- Self-encapsulated design 2025 LED;
- Light source lifetime:50K hours(L70);
- Meet (EU)2019/2020 ErP regulations.
- Min. Bending Diameter: 60mm
- Max. length(M): 5M

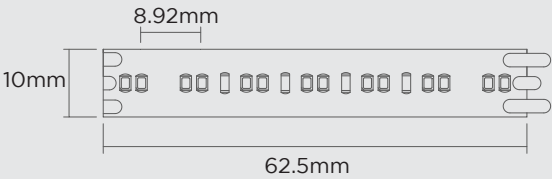

Optical test Diagram

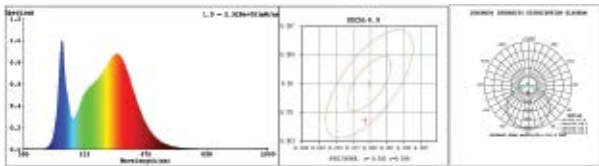

IP	Series	CRI	Power (W/m)	CCT (K)	Lumen (lm/m)	Efficiency (lm/W)
20	LED STRIP TUNABLE 1	80	9.6	2700K	1140	122
				6000K	1240	130
	LED STRIP TUNABLE 2	90	9.6	2700K	960	101
				6000K	1030	117
67	LED STRIP TUNABLE 3	80	9.6	2700K	1080	117
				6000K	1170	127
	LED STRIP TUNABLE 4	90	9.6	2700K	910	98
				6000K	970	113

ORDERING CODE

SERIES NAME - PRODUCT RANGE - IP - CRI - CCT - CONTROL

LED STRIP	1	20 20	80 80	27 2700K	1	ON-OFF
TUNABLE WHITE	2	67 67	90 90	60 6000K	2	1-10V
	3				3	DALI
	4					