

THAQAB SERIES



Upon request



PHYSICAL

Body	High pressure die-cast aluminum
Finish	Grey (Default) /Black (available on request)

OPTICAL

Optic	UV resistant PC
Light Distribution	25°, 60°, 90°, 120° or Asymmetrical
Diffuser	Tempered glass

ELECTRICAL


Light source	LED
CRI	>70
CCT	3000K,4000K,5000K,5700K
Driver	Electronic included 50-60Hz 220-240VAC 1-10V dimming or DALI on request
Protection	Class I/II
Ambient Temp.	-40°C - 50°C
Ambient Humidity	10% - 90%

THAQAB series of projectors to be mounted on pole system, wall, floor. Available in several sizes, rotatable and inclinable on the vertical axis, they are designed for the lighting of parking lots, cycle paths, squares, façades, green areas, perimeter areas and other architectural elements in general thanks to a wide range of optics and wattages. It comes with a series of accessories that ensure different type of mounting.

Product Benefits:

- Up to 100, 000hrs @ L70, low maintenance cost.
- World class, approbated quality components (LEDs /Driver /etc.)
- Equipped with vent to avoid internal fogging and frosting.
- Wide choice of optics to suit more applications (asymmetrical and symmetrical)
- Buckle design makes it very easy for further maintenance.

AVAILABLE OPTICS




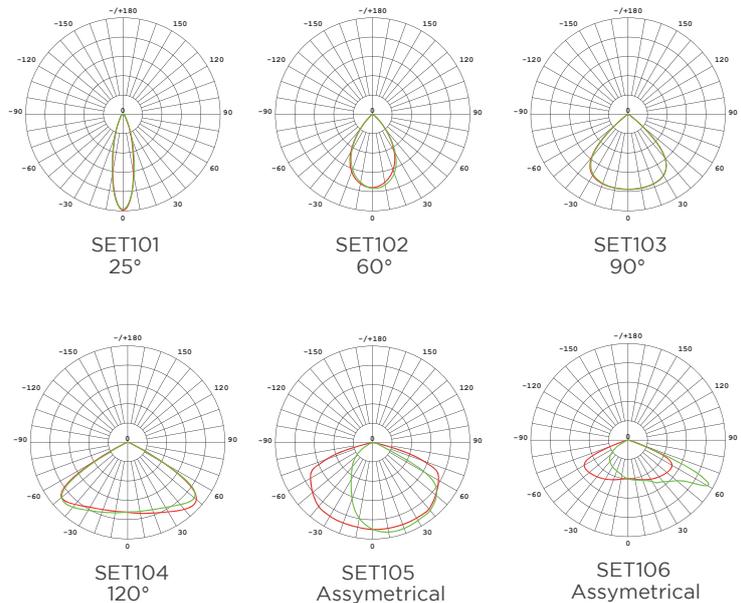


THAQAB MINI

THAQAB MIDI

THAQAB MAXI

THAQAB XL



PRODUCT RANGE


	Rated Power(W)	Lumen(lm)	Dimensions(mm)
THAQAB MINI 1	30W	4650lm	L226xW81xH345mm
THAQAB MINI 2	40W	6000lm	L226xW81xH345mm
THAQAB MINI 3	50W	7000lm	L226xW81xH345mm
THAQAB MIDI 1	60W	9900lm	L321xW90xH447mm
THAQAB MIDI 2	80W	12800lm	L321xW90xH447mm
THAQAB MIDI 3	100W	14500lm	L321xW90xH447mm
THAQAB MIDI 4	120W	17400lm	L321xW90xH447mm
THAQAB MAXI 1	150W	24000lm	L378xW90xH495mm
THAQAB MAXI 2	180W	27900lm	L378xW90xH495mm
THAQAB MAXI 3	200W	29000lm	L378xW90xH495mm
THAQAB MAXI 4	240W	33600lm	L378xW90xH495mm
THAQAB XL 1	320W	51200lm	L378xW90xH495mm
THAQAB XL 2	400W	60000lm	L378xW90xH495mm

ORDERING CODE

SERIES NAME - PRODUCT RANGE - CCT - OPTICS - CONTROL - ACCESSORIES

THAQAB	MINI 1	30 3000K	SET101 25°	1 ON-OFF	NA NO ACCESSORIES
	MINI 2	40 4000K	SET102 60°	2 1-10V	PH PHOTOCELL
	MINI 3	50 5000K	SET103 90°	3 DALI	PS PIR SENSOR
	MIDI 1	57 5700K	SET104 120°		SM SMART CONTROLLER
	MIDI 2		SET105 Assymetrical		PA POLE ADAPTER
	MIDI 3		SET106 Assymetrical		CB CLight source BRACKET
	MIDI 4				MA MOUNTING ARM
	MAXI 1				ES EXTRA 10KV
	MAXI 2				
	MAXI 3				
	MAXI 4				
	XL 1				
	XL 2				

ACCESSORIES



PHOTOCELL PIR SENSOR SMART CONTROLLER POLE ADAPTER CLight source BRACKET MOUNTING ARM EXTRA 10KV SPD